


Data sheet

Part No.	FXP LG
Description	pliable conduit, corrugated, with turbo grooves medium compression resistance, medium impact resistance
Colour	light grey, similar to RAL 7035
Fire Behaviour	non flame propagating
Classification	33412
Compression resistance	> 750 N



Standard: EN 61386-1, EN 61386-22,

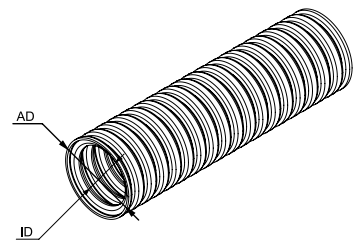

Compressive strength	Impact strength	Operating temperature	Bending strength	UV resistant
Medium (class 3)	Medium (class 3)	-25 to +60 °C	Pliable	true – up to 10 years

Art. No.	ED	ID	Bending radius	PU	PU
084483	16 mm	10,7 mm	80 mm	50 m	2700 m
084484	20 mm	14,1 mm	100 mm	50 m	2700 m
084485	25 mm	17,8 mm	125 mm	50 m	1600 m
084486	32 mm	23,6 mm	160 mm	25 m	675 m
096842	40 mm	31,1 mm	200 mm	25 m	500 m
096843	50 mm	39,4 mm	250 mm	25 m	300 m
096844	63 mm	52,1 mm	315 mm	25 m	175 m

Areas of Recommended Application

Area	
Flush mounted (plaster)	True
Surface mounted	True
Suitable for concrete installation	True
Machine and systems installation	True
Suitable for subsurface installation (screed)	True
Outdoor installation	True
Suitable for installation on wood	True
Hollow wall	True
Underground installation	True

Further technical details

Details	
Halogen free	False
With sleeve	False
Fire retardant version	True
Material	PVC-U